



CLASSIC VEHICLES

FROM THE TILE INDUSTRY

lendar

2014






























www.nacproducts.com 1(800)633.4622

Crack Isolation Waterproofing

Sound Control Moisture Barrier



Calendar Copyright ©2013 NAC Products, Inc. All vehicle photos used with permission Printed in U.S.A. October 2013



OCTOBER 2014 DECEMBER 2014 NOVEMBER 2014 1 2 3 4 5 6 1 2 3 4 5 6 7 8 9 10 11 7 8 9 10 11 12 13 12 13 14 15 16 17 18 14 15 16 17 18 19 20 19 20 21 22 23 24 25 21 22 23 24 25 26 27 26 27 28 29 30 31 28 29 30 31 6 9 10 12 13 11 14 15 Veteran's Day 21 22 16 17 19 20 18 23 24 25 26 28 29 27 Thanksgiving Day

30

Did you know you can use strip applications to protect tile from isolated cracks in a substrate by utilizing **ECB® Kits**? The **ECB® Kit** contains a 1'x50' roll of ECB® membrane while the Large Tile Kit has a 2'x25' roll. Both kits include a pint of primer, primer brush and a utility knife.



JANUARY 2014 March 2014 Do you own a classic vehicle or do you know someone 1 2 3 4 5 6 7 8 9 10 11 2 3 4 5 6 7 8 in the tile industry who does? NAC is looking for pictures 12 13 14 15 16 17 18 9 10 11 12 13 14 15 to be submitted for the 2015 calendar. Send pictures to 19 20 21 22 23 24 25 16 17 18 19 20 21 22 dhanna@nacproducts.com for consideration. 26 27 28 29 30 31 23 24 25 26 27 28 29 30 31 Design & Construction Week KBIS/NAHB International Builders Show Las Vegas 9 10 12 14 11 13 15 Lincoln's Birthday Valentine's Day 16 22 17 18 20 21 19 Commercial Construction & Renovation Tampa Washington's Birthday President's Day 23 26 24 25 27 28

FEBRUARY 2014



Did you know ECB® 75 anti-fracture membrane has been sound tested and achieved an IIC of 65* and STC of 67*? In addition to sound control capabilities, ECB® 75 also provides crack isolation up to 1/4" lateral movement and is available in 3'x75' rolls. (*tested on 8" slab with SRCA)



SUNDAY MONDAY TUESDAY WEDNESDAY THURSDAY FRIDAY SATURDAY FEBRUARY 2014 **APRIL** 2014 **MARCH 2014** 1 2 3 4 5 2 3 4 5 6 7 8 6 7 8 9 10 11 12 9 10 11 12 13 14 15 13 14 15 16 17 18 19 16 17 18 19 20 21 22 20 21 22 23 24 25 26 23 24 25 26 27 28 27 28 29 30 FCICA Convention • St. Pete Beach, FL 10 12 13 14 15 22 16 17 19 20 21 18 First Day of Spring 23 24 25 26 29 27 28 Did you know the Extreme Deck Kit provides a double layer of waterproof protection for 30 31 exterior decks and balconies in the convenience of a kit? The **Extreme Deck Kit** contains

the **Extreme Deck Kit** contains everything needed to cover a 300 Sq. Ft. deck.

NAC TAC primer, SubSeal® liquid waterproof membrane, seam tape, preformed corners and polyurethane sealant. When combined with two rolls of Strataflex sheet membrane,



SUNDAY	MONDAY	TUESDAY	WEDNESDAY	THURSDAY	FRIDAY	SATURDAY
MARCH 2014 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31	MAY 2014 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31	1	2	3	4	5
6	7	8	9	10	11	12
13	14	15	16	17	18	19
20	21	22	23	24	25	26
27	28	29 Covering	30 s • Las Vegas		Do you own a classic vehic in the tile industry who does to be submitted for the 2015 dhanna@nacproducts.com f	calendar. Send pictures to

APRIL 2014

Did you know **SubSeal**® liquid waterproof membrane can also function as a stand alone crack suppressant and moisture barrier for hard surface, resilient and wood flooring? **SubSeal**® is a one part, ready-to-use elastomeric membrane suitable for interior and exterior use and is a main component of the Extreme Deck System.





MAY 2014

Did you know **Super SAM™ 125** is the most effective "all-in-one" membrane on the market today? **Super SAM™ 125** is about 1/8' thick and is engineered for use without a sound rated ceiling assembly. **Super SAM™ 125** has a light commercial/residential load rating and is composed of modified elastomers, sound deadening resins and reinforced woven fibers.





JUNE 2014



Did you know **Strataflex** waterproofing sheet membrane also provides crack isolation protection up to 3/8"? **Strataflex** also features a 2" double stick lap joint that creates a watertight seal. **Strataflex** can be used for indoor and outdoor applications and is a main component of the Extreme Deck System.



SUNDAY	MONDAY	TUESDAY	WEDNESDAY	THURSDAY	FRIDAY	SATURDAY
JUNE 2014 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30	AUGUST 2014 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31	1	2	3	4 Independence Day	5
6	7	8	9	10	11	12
13	14	15	16	17	18	19
20	21	22	23	24	25 EBC • Orlando	26
27	28	29	30	31		

JULY 2014

Did you know **NAC TAC** (Blue) can be used for interior and exterior applications while **NAC TAC II** (Green) is for interior use only? The primers are NOT freeze/thaw stable. **NAC TAC** and **NAC TAC II** primers are necessary components of NAC Systems and are required in order to meet minimum shear strength mandates by ANSI A118.10 for load bearing, bonded waterproof membranes.



JULY 2014 SEPTEMBER 2014 AUGUST 2014 1 2 3 4 5 1 2 3 4 5 6 6 7 8 9 10 11 12 7 8 9 10 11 12 13 13 14 15 16 17 18 19 14 15 16 17 18 19 20 20 21 22 23 24 25 26 21 22 23 24 25 26 27 27 28 29 30 31 28 29 30 8 12 14 10 11 13 15 16 20 22 17 18 19 21 23 24 25 26 27 28 29 30 Did you know **SAM™ 3** is a 70 mils thick (about 3/32") sound control 31

www.nacproducts.com • (800)633.4622

membrane and has an IIC rating of 58* and an STC rating of 54*?

SAM™ 3 is engineered and tested to be used with a Sound Rated

Ceiling Assembly (SRCA). SAM™ 3 also provides waterproofing

and crack isolation up to 3/8" of lateral movement.



SUNDAY	MONDAY	TUESDAY	WEDNESDAY	THURSDAY	FRIDAY	SATURDAY
	1	2	3	4	5	6
	Labor Day				1800	
7	8	9	10	11	12	13
1.84	1.50	1.82		Patriot's Day		
14	15	16	17	18	19	20
130	1.32	1.30	325	1.80	1.30	1.30
21	22	23	24	25	26	27
1 30	1.32	First Day of Autumn		1.84	1.32	130
28	29	30	August 2014 1 2 3 4 5 6 7 8 9	OCTOBER 2014 1 2 3 4 5 6 7 8 9 10 11		
1.54	136	13.5	10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31	12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31	A	

SEPTEMBER 2014

Did you know **Moisture Lock®** is a chemical liquid hardener for cementitious and porous substrates? Moisture Lock® strengthens and hardens substrates to minimize absorption while maximizing the coverage of NAC primers.






SUNDAY	MONDAY	TUESDAY	WEDNESDAY	THURSDAY	FRIDAY	SATURDAY
	SEPTEMBER 2014 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30	NOVEMBER 2014 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30	1	2	3	4
5	6	7	8	9	10	11
12	Columbus Day	14	15	16	17	18
19 The Inte	20 rnational Surf	21 ace Event East	22 • Miami	23	24	25
26	27	28	29	30	31	

OCTOBER 2014


Did you know **ECB® Classic** is the original anti-fracture membrane? Brought to market in 1983, ECB® Classic provides crack isolation up to 3/8" and is available in 1'x50', 2'x50' and 3'x50' rolls.



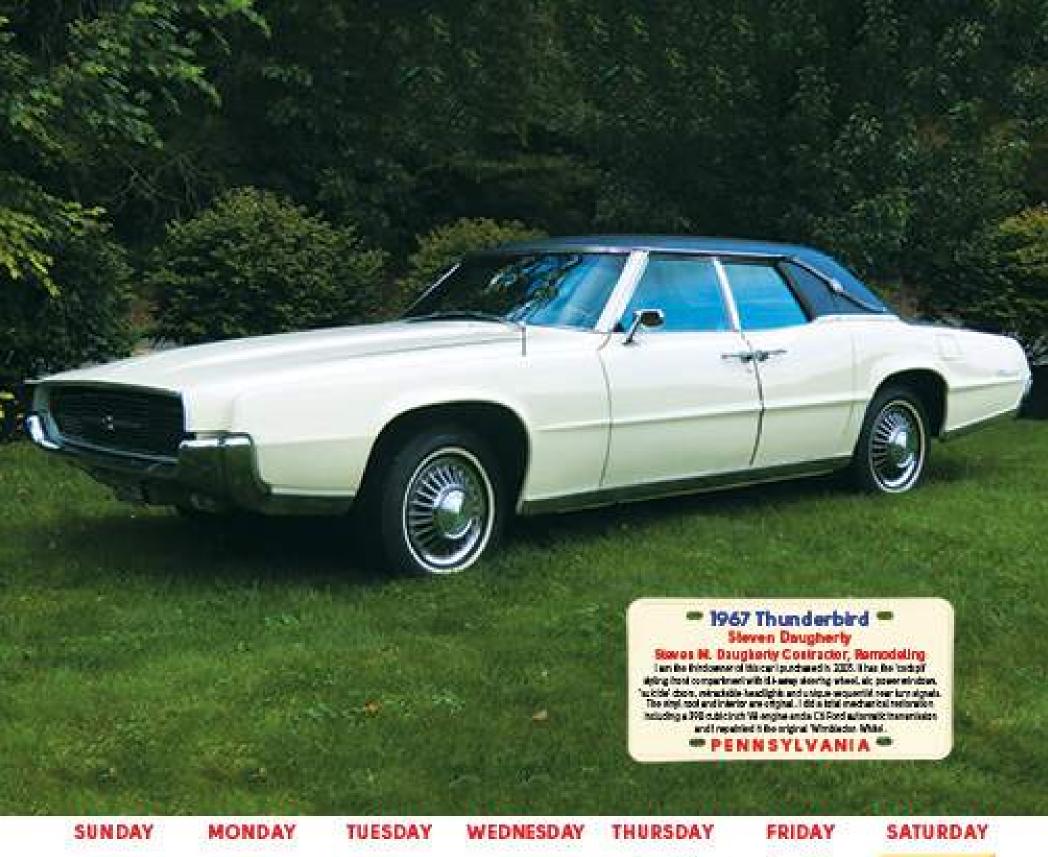

SUNDAY	MONDAY	TUESDAY	WEDNESDAY	THURSDAY	FRIDAY	SATURDAY
Nov	EMBER	2014		0 cross 2014 1 2 3 4 5 8 7 8 9 80 11 12 13 14 15 16 17 16 19 20 21 22 23 24 25 24 27 26 29 30 31	Decrees 2014 1 2 3 4 5 6 7 6 9 10 11 12 13 14 15 16 17 16 19 20 21 22 23 24 25 26 27 28 29 30 30	1
2	3	4	5	6	7	8
9	10	n	12	13	14	15
100	1000	Vaterania Day		35		La Addition
16	17	18	19	20	21	22
(80%)	100		Desire.	100	180	
23	24	25	26	27	28	29
30	V	in a substrate by utili	an use strip application izing ECBo Kits? The Et e Large Tile Kit has a 2)	CBO Kit contains a l'x5	O'roll of ECB®	THE

primer, primer brush and a utility knife.

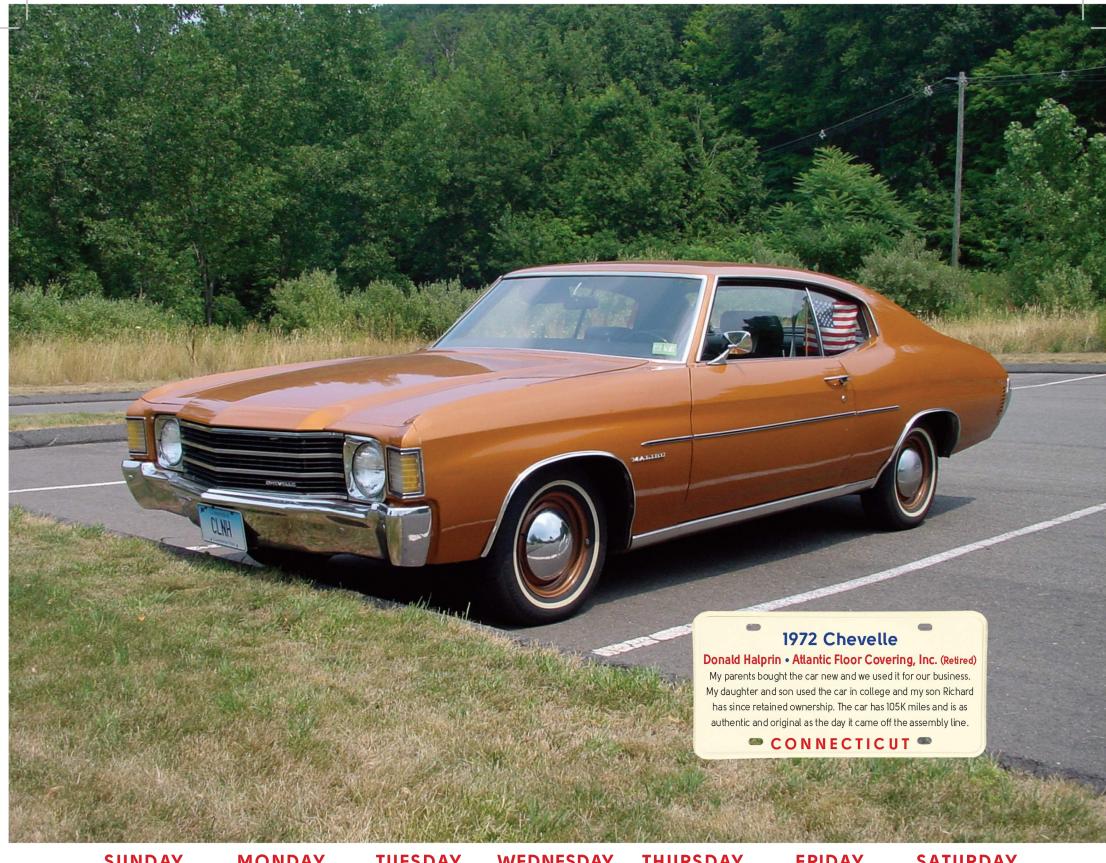

	SUNDAY	MONDAY	TUESDAY	WEDNESDAY	THURSDAY	FRIDAY	SATURDAY
	1	2	3	4	5	6	7
	8	9	10	11	12	13	14
	15	16	17	18	19	20	21 First Day of Winter
	22	23	24	25 Christmas	26	27	28
	29	30	31 New Year's Eve	NOVEMBER 2013 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30	JANUARY 2014 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31		
Did you know NSO7 is a non-flammable solvent-							

DECEMBER 2013

Did you know NS97 is a non-flammable, solventbased primer for use in exterior applications? **NS97** is for exterior applications only and is capable of excellent bond strength at low temperatures. The pre-mixed formula requires no thinning.



